

TB-2008-003
Motor Selection Guide
Basic Motor Technology Overview

AC Induction Motors

- AC Induction Motors are brushless for long life
Standard Input Power- 200 VAC, 400 Hz, 3 phase per
Optional Power- 115 VAC single phase, 400 Hz
440 VAC, 60Hz, 3 Phase

What is an AC Induction Motor? Essentially this is a non-permanent magnet motor with a wound field and copper barred rotor.

Advantages: High Speed rigid construction


<u>Poles:</u>	<u>Speed (RPM'S MAX)</u>
2	23000
4	11,800
6	7660
8	7000

Operating Temperature Range: -65F- +160F

Bearings: ABEC CLASS 7



AC Induction Motor Cross Section

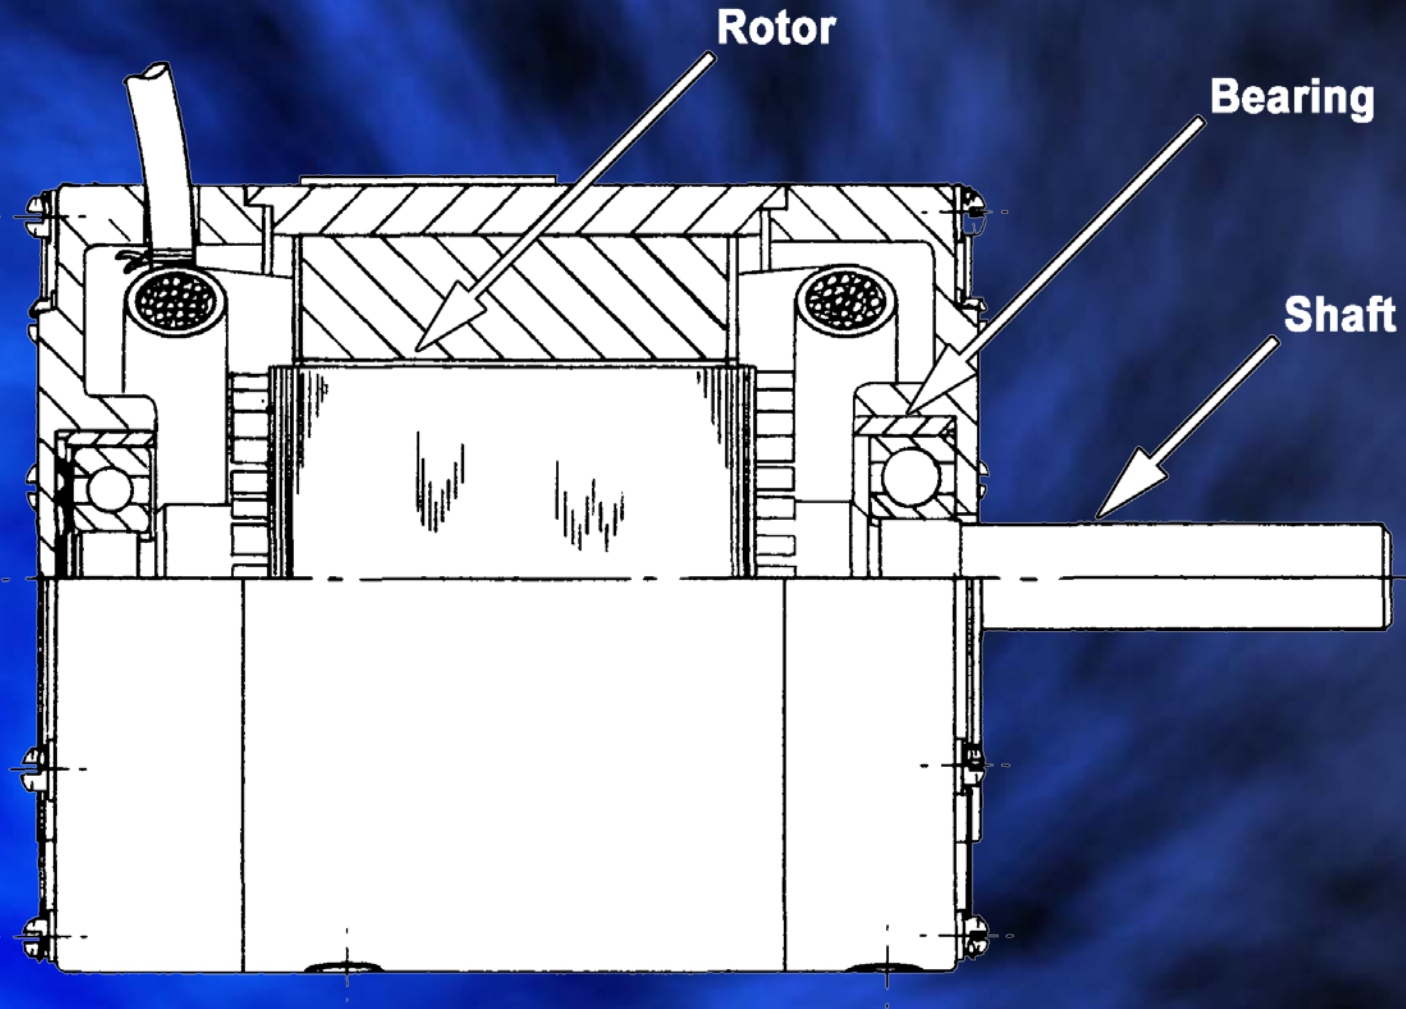

Motor Housing Types

- Motor Housing Enclosure Types-
- TENV- Totally enclosed non-ventilated
 - TEAO- Totally enclosed air over
 - VEP- Ventilated explosion Proof
 - VEPOA- Ventilated Explosion Proof Air Over


Shaft Rotation-CCW viewed from the shaft end
Applications: Fans
Pumps

■ Brushless DC Motors


- Permanent Magnet Rotor Assembly- Neodymium-Iron-Boron
- Need amplifier (controller) in order to commutate windings
 1. Integrated Controller/Amplifier
 2. External Controller/Amplifier
- Compatible with BEMF (back electromotive force) commutation
- Speed sensing capability with external speed detection sensor
- Rigid construction
- ABEC 7 Bearings
- Speed range- 8,100-24,000rpms



BLDC Motor

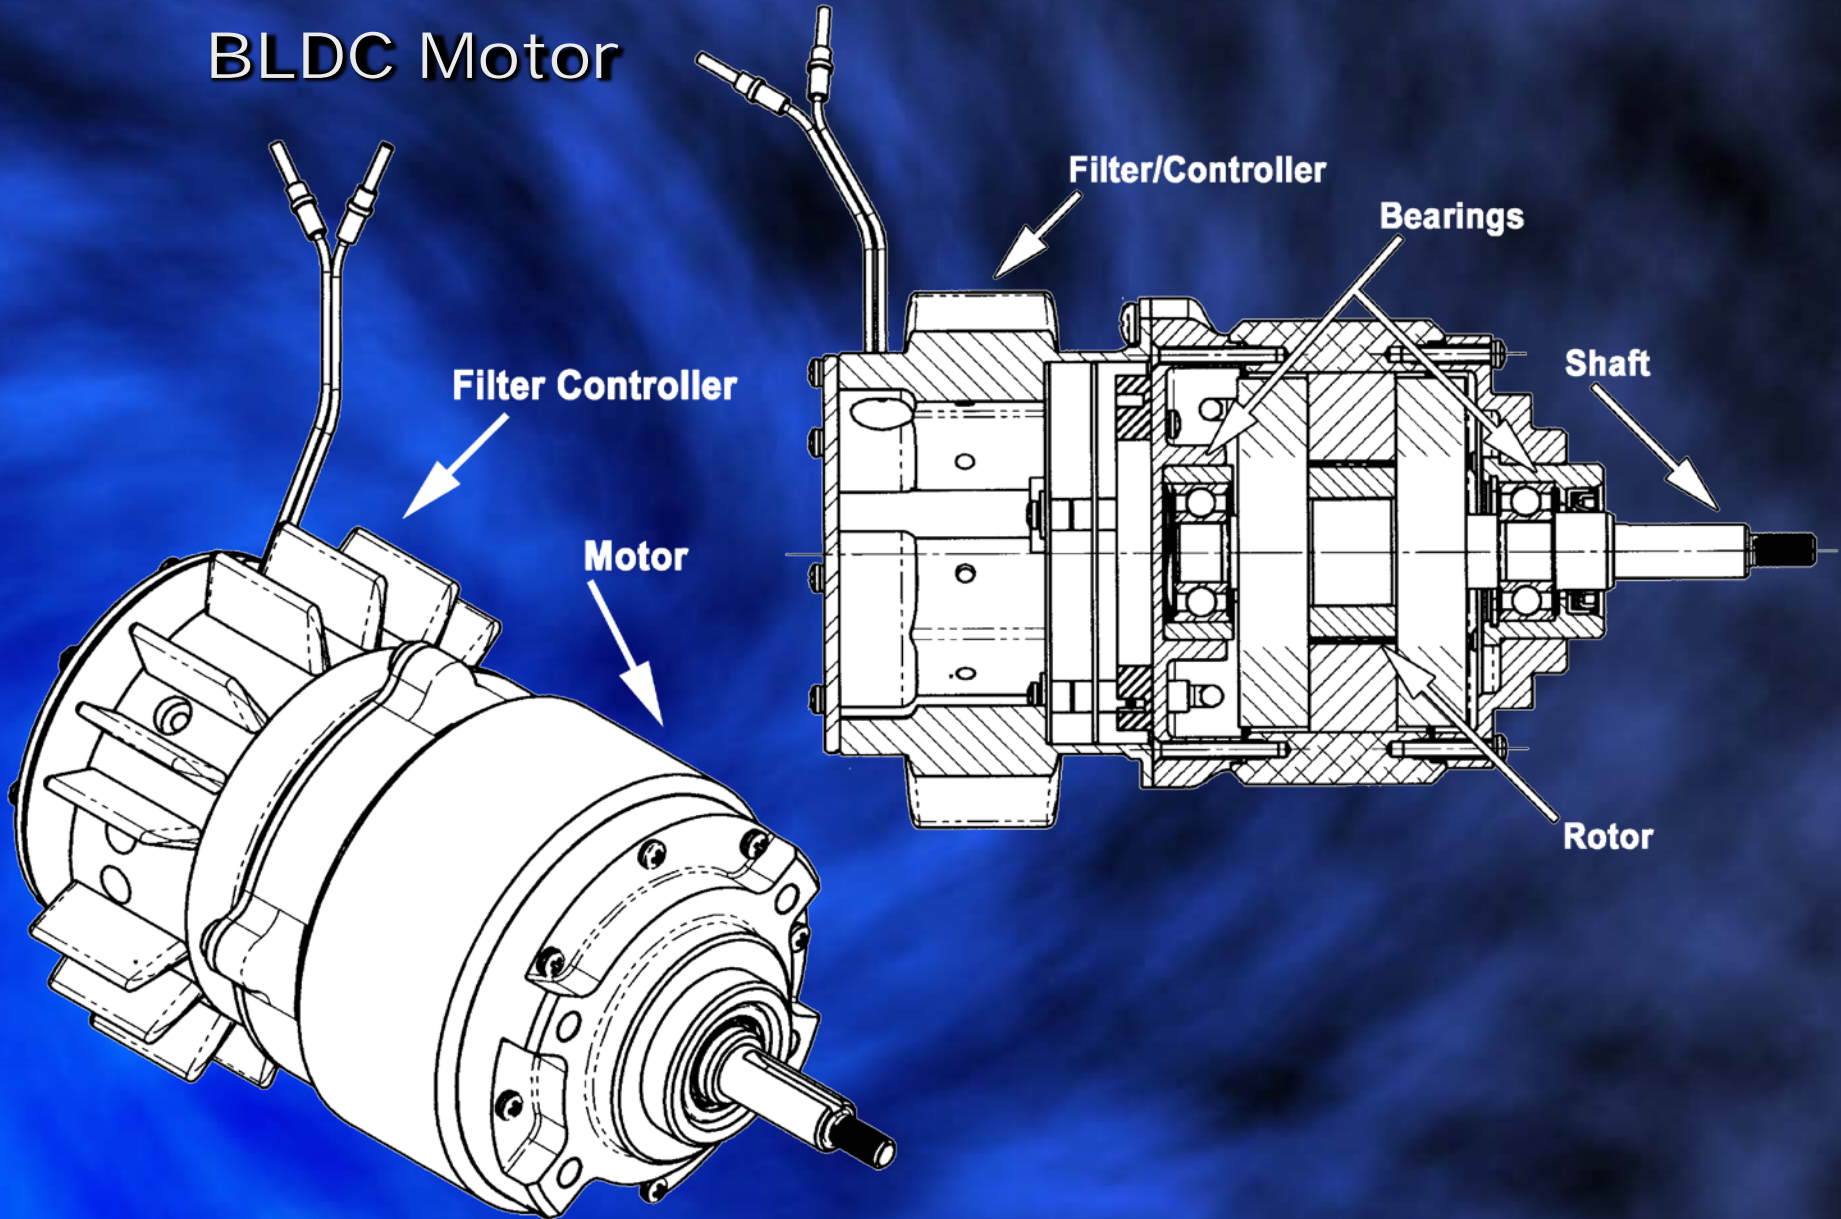

External BLDC Controller

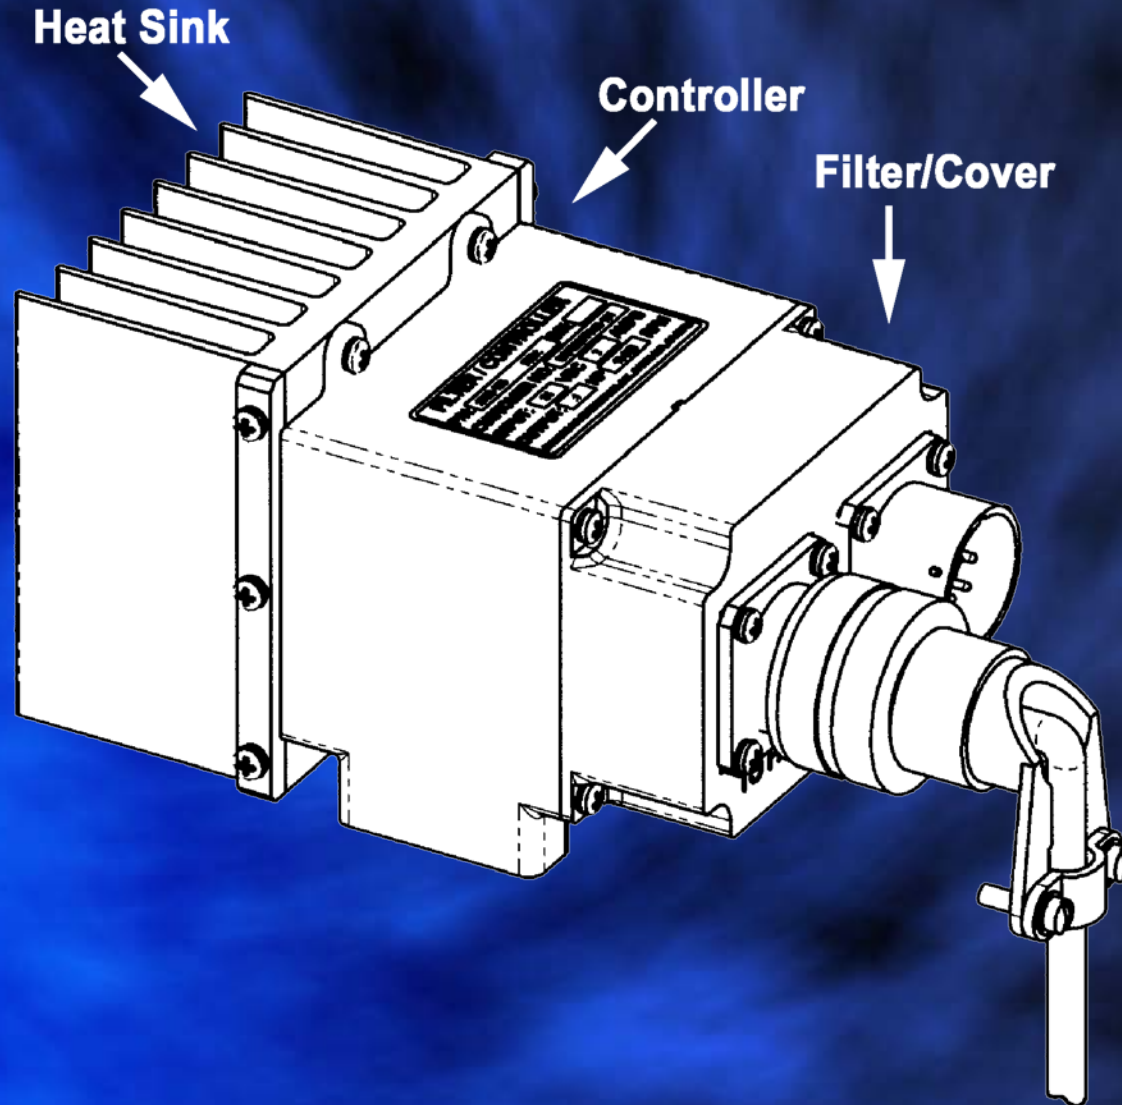

Reference for Motor Sizing

Motor Sizing Formulas

Inertia- a property of matter where a body offers resistance to any change in its state of rest or uniform motion.

Inertia Types: Point mass at a radius:

$$J = \frac{\text{weight} \times \text{radius}^2}{384} = \text{Lb-in-sec}^2$$

Circular body (ring)

$$J = \frac{\text{weight} \times \text{radius}^2}{384} = \text{Lb-in-sec}^2$$

Circular body (solid)

$$J = \frac{1/2 \text{ weight} \times \text{radius}^2}{384} = \text{Lb-in-sec}^2$$

Note: units in these formulas can be english or metric

Torque Required to Accelerate a load

$$T = \frac{J \times N \times \pi}{30 \times t_a} + FT$$

J=system inertia (lb-in-sec²)

N= motor speed (rpm)

t_a = allowed time to accelerate (sec)

FT= friction Torque

Motor Sizing Formulas

$$\text{Brake Horsepower} = \frac{\text{Torque (in-Lb)} \times \text{RPM}}{63,025}$$

$$\text{Hz} = \frac{\text{RPM} \times \#\text{Poles}}{120}$$

$$\text{Watts} = I \times V$$

$$\text{Electrical Efficiency} = \frac{0.746 \times \text{bhp}}{\text{kW}}$$

Note: 746 watts/HP

$$\text{Input HP} = \frac{\text{BHP}}{\text{Motor Efficiency}}$$

